



ZMM STOMANA JSC



• ПРОБИВНА МАШИНА •

LANGLOCHBOHRMASCHINE • MORTISER

LBM 200






- Серийни машини с 1 бр. ексцентрикова стяга и шалтер за защита на мотора
- Фиксиране дължината и дълбочината на пробиване
- Опорен лост за серийна работа
- Наклон на пробивната глава
- Патронник Westcott 0-20 със защитен канак
- Лесно настройване по височина посредством маховик
- Лек преместване на пробивната глава посредством само на един лост
- Serienmässig mit 1 Stk. Exenterspanner und Motorschutzschalter
- Inklusive Bohrlängen- und Bohrtiefenfixierung
- Anschlagstange für Serienarbeit beidseitig verwendbar
- Schwenkbares Bohraggregat
- Westcott-Bohrfutter 0-20 mm mit Schutzabdeckung
- Leichtgängige Höheneinstellung des Bohraggregates mittels Handrad
- Leicht verstellbarer Kreuzsupport mit Einhandbedienung
- Serial machines with 1 piece eccentric clamp and schalter for motor protecting
- Fixing of the length and the depth of drilling
- Support rod for serial production
- Tilt of the boring head
- Chuck Westcott 0-20 with protective cover
- Easy adjustment by height with handwheel
- Moving of the boring head by only one lever

ПРОБИВНА МАШИНА	LANGLOCHBOHRMASCHINE	MORTISER	LBM 200
Размери на работната маса, mm	Bohrtischgröße, mm	Working table dimensions, mm	600 x 320
Височина на работната маса, mm	Bohrtischhöhe, mm	Height of the working table, mm	870
Надлъжен ход на масата, mm	Bohrtiefe, mm	Longitudinal motion of table, mm	Max. 245
Напречен ход на масата, mm	Bohrbreite, mm	Transversal motion of table, mm	Max. 205
Вертикален ход на масата, mm	Höhenverstellung, mm	Vertical motion of the table, mm	Max. 165
Наклон на пробивната глава	Schwenkbares Bohraggregat	Tilt of the boring head	45° 0° -45°
Обороти, min ⁻¹	Drehzahl, min ⁻¹	Revolutions, min ⁻¹	2840
Мощност на мотора, kW (HP)	Motorleistung, kW (PS)	Motor power, kW (HP)	2.2 (3.0)
Тегло, kg	Gewicht, kg	Weight, kg	180

Опции ● Optionen ● Options

- Мотор двускоростен 2,4/3,0 kW
- Устройство за стъпково пробиване на 16-22-25-32 мм
- Линеал въртящ
- Уширение на плота
- Количка
- Motor mit 2 Geschwindigkeiten 2.4/3.0 kW
- Dübelbohrereinrichtung mit Teilung 16-22-25-32 mm
- Dübelschlag
- Ausziehbare Tischverbreiterung
- Fahreinrichtung
- 2 speeds motor 2.4/3.0 kW
- 4 size rotor group with fixed positions at 16-22-25-32 mm
- Miter fence
- Extension of the table
- Wheel set

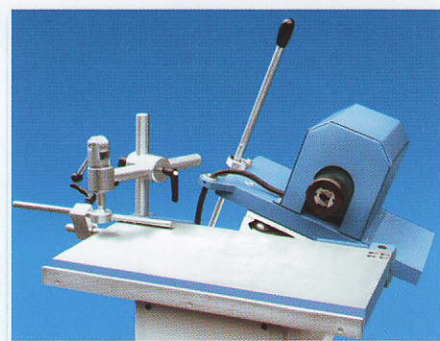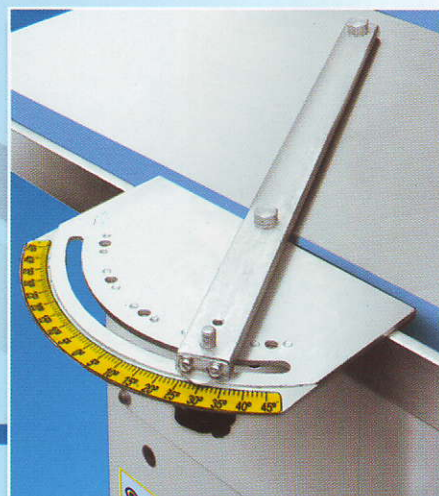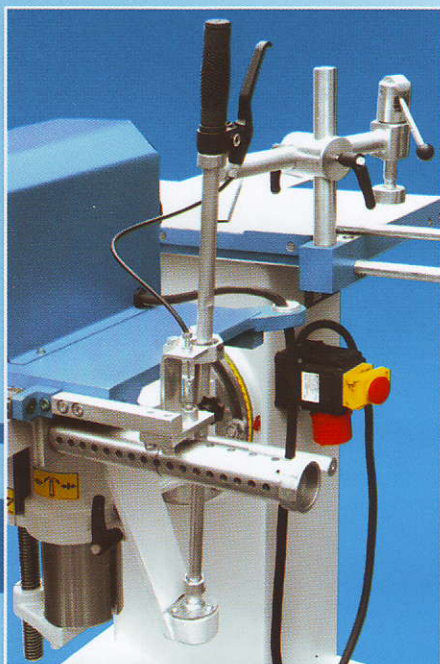

Наклон на пробивната глава
Beidseitig schwenkbares Bohraggregat
Tilting of the boring head

Линеал въртящ
Gehrungsanschlag
Miter fence

Устройство за стъпково пробиване на 16-22-25-32 мм
Dübelbohrereinrichtung mit Teilung 16-22-25-32 mm
4 size rotor group with fixed positions at 16-22-25-32 mm

7500 Силистра
ул. "Тутраканска" №16

тел.: 086/821 058
пласмент: 086/821 052
факс: 086/821 071
e-mail: stomana@ b-trust.org
stomana@ mbox.contact.bg
www.stomana.dir.bg

16, Tutrakanska Str.
7500 Sillistra, BULGARIA

tel.: +359 86/821 058
sales: +359 86/821 052
fax: +359 86/821 071
e-mail: stomana@ b-trust.org
stomana@ mbox.contact.bg
www.stomana.dir.bg

